


FONIC ACOUSTIC FELT BACKED PANELS



TECHNICAL DATA

Wood Veneer Options

White oak varnished, grey stained, white washed, walnut

Dimension:

11.75" x 96" / 7.8 sq.ft.

Thickness:

22 mm

Finish:

10% U.V. varnish (low V.O.C. water based clear sealer) Antimicrobial protection

Fire rating:

Class A - ASTM E84 - *CAN/ULC-S102 *Black MDF Core *Fire Treated Wood Veneer

NOTE: Felt backing is not fire rated.



LAYERS

Top:

Wood veneer with a MDF core

Bottom:

Felt

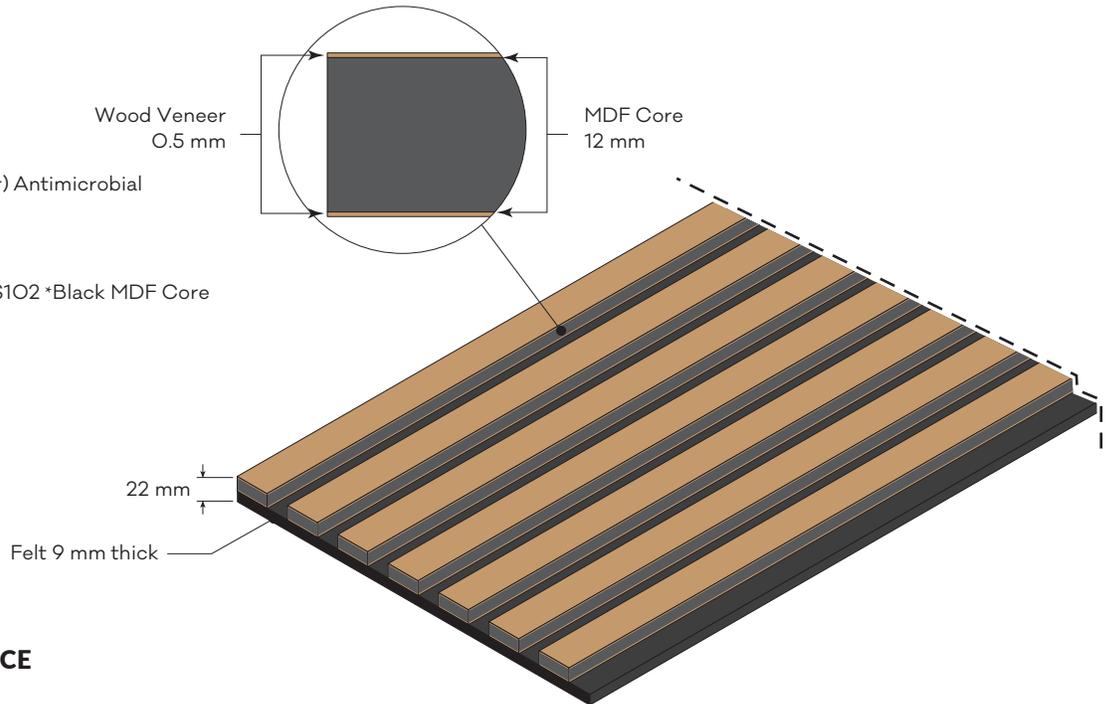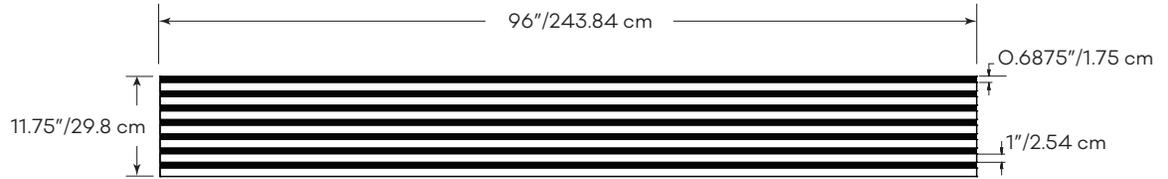

ACOUSTICAL PERFORMANCE

Frequency (Hz): Absorption coefficient:

250	0.153
500	0.355
1000	0.710
2000	0.9333

NRC:

0.54 up to 0.90
*refer to the sound test report for details on the NRC ratings and options for installation.

SAA:

0.56

Absorption Spectrum of Tested Panels

